


P3 Light Wiring Diagram

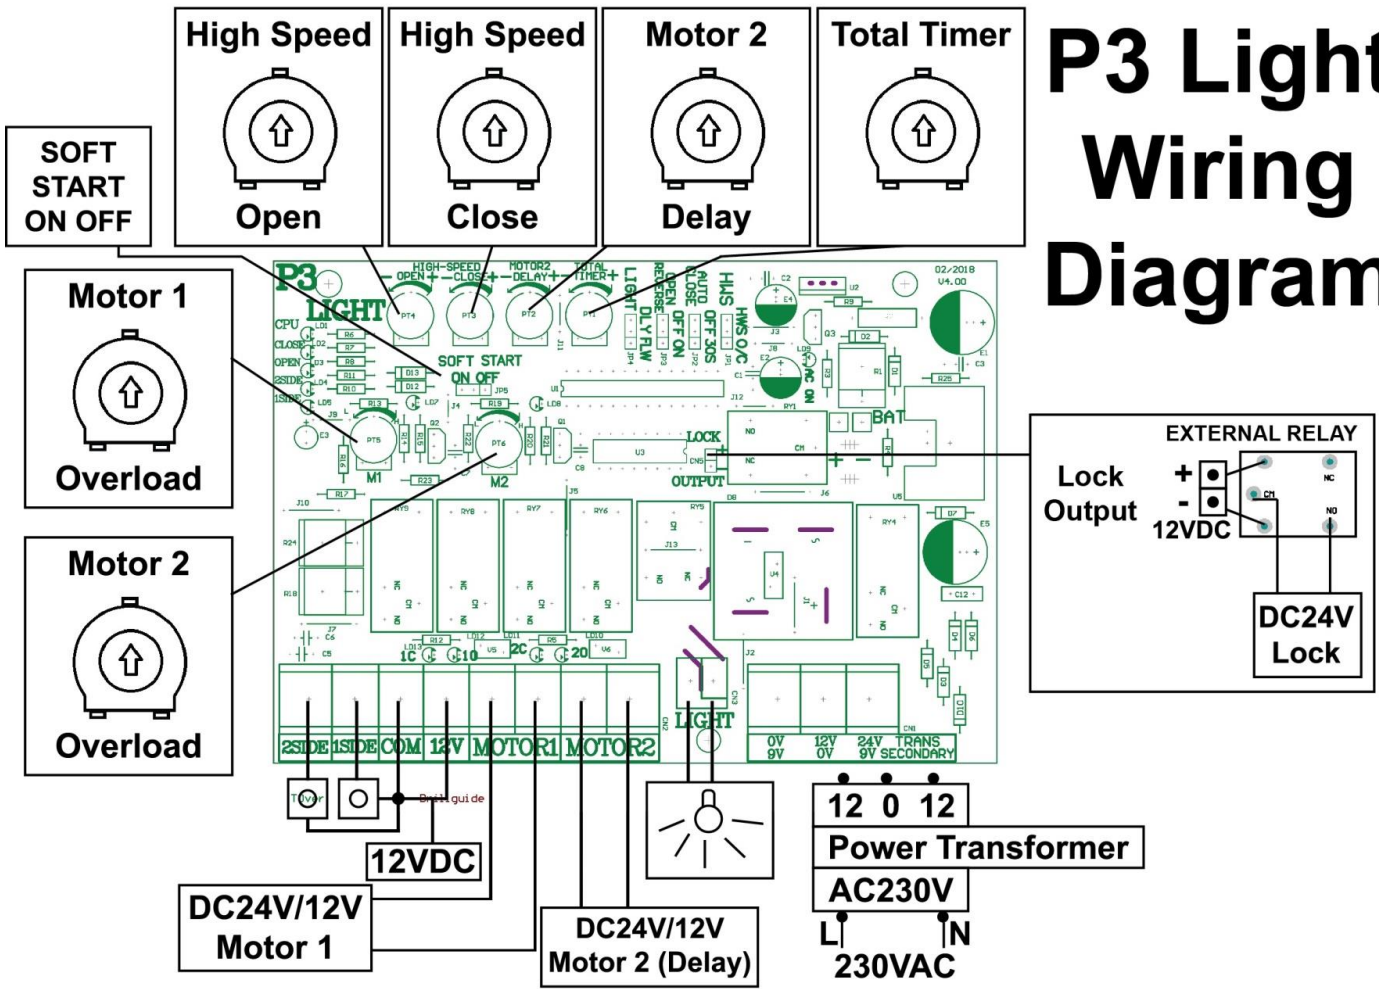

| | | Function options | Description | Application Notes |
|-----|--------------|------------------|---|---|
| JP1 | | HWS | Open, Stop & Close | |
| | | OP/CL | Open & Close only | |
| JP2 | Auto Close | 30 Second | Gate auto close after remained open for 30 seconds | |
| | | Off | Select if function not required | |
| JP3 | Open Reverse | On | Open Reverse enabled | When enabled, the movement of the gate is first reversed, then open |
| | | Off | Open Reverse disabled | |
| JP4 | Light | Follow | Light status & motor movement in parallel | Light is on when motor is on, light is off when motor is stopped |
| | | Delay | Light status is set to be off after a delay of 60 seconds | When gate is closed, light will be off after 30 seconds |
| JP5 | Soft Start | On | Soft Start enabled | Firmware Run at 3speed Slow → Fast → Slow |
| | | Off | No Soft Start function | |