


AMP-7

SWING GATE CONTROL PANEL

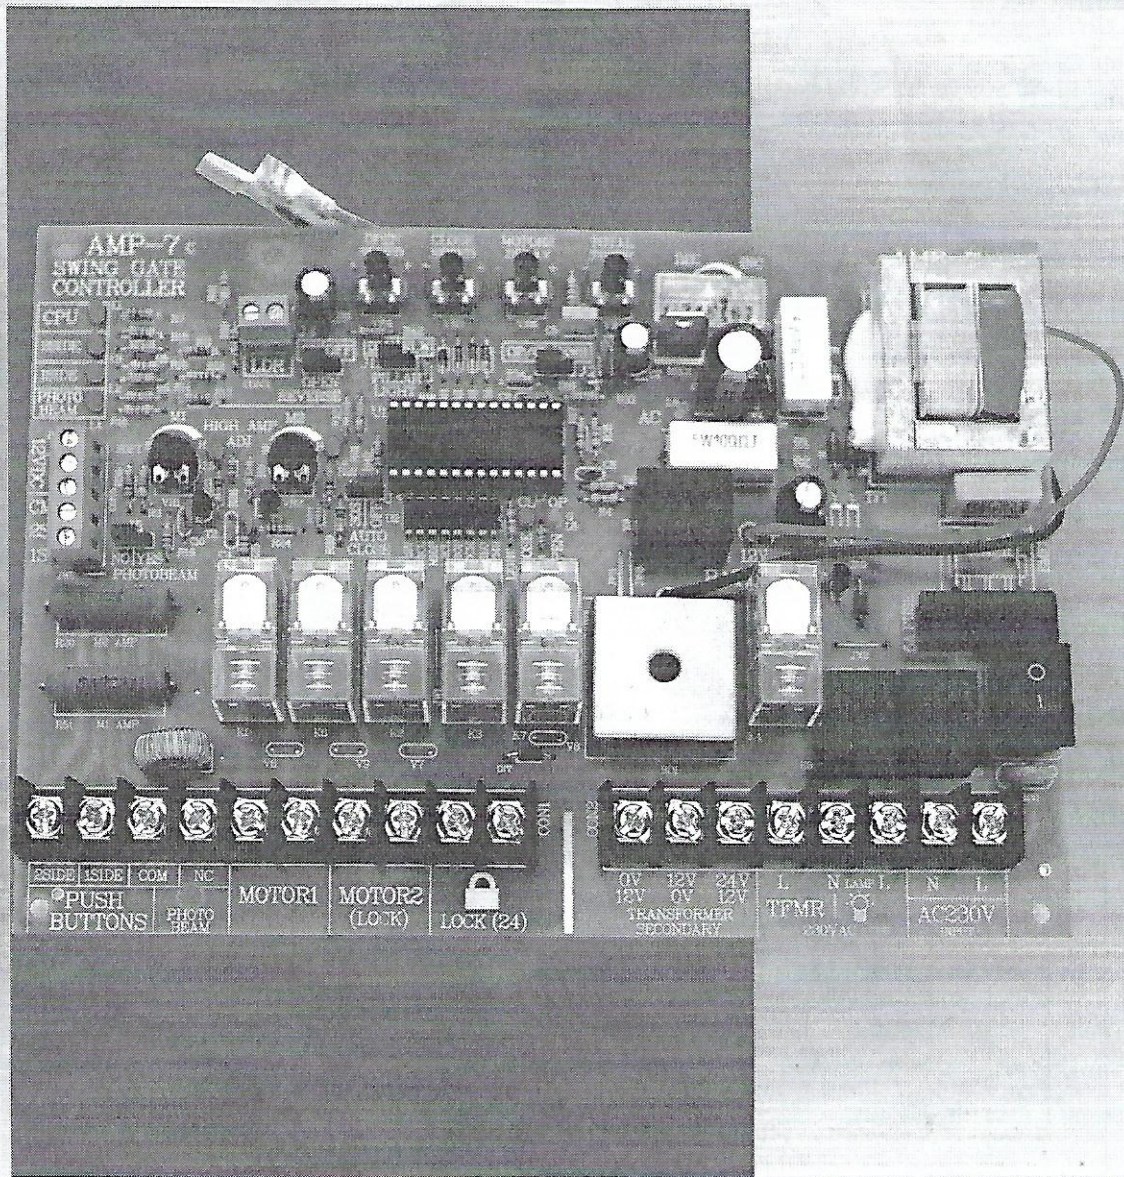

Features

- "Open/Stop/Close" Function
- "Close only" Function
- Remote control function
- Safety Auto-Reverse & Auto-Stop Function
- Adjustable sensitivity for Open and Close force control
- Limit Switch NO/NC settings (Jumper Selectable)
- 90 seconds maximum continuous running duration
- 40s or 60s Auto Close (Jumper Selectable)
- LED Signal Indication for gate positioning
- Anti-crash protection: Safety Photobeam

GAINCOM SDN BHD (181982-U)


(Head Quarters)
Lot 1086 & 1087, Batu 1 Jalan Seremban,
Taman Woon, 73000 Tampin, NSDK, Malaysia.

Tel: 606 - 441 8941 Fax: 606 - 441 8942

(Sales & Services)
No. 531, Jalan Riang 12, Taman Gembira,
58200 Kuala Lumpur, Malaysia.

Tel: 603 - 7984 9909 Fax: 603 - 7980 7862
Email: info@gaincom.com.my
Website: www.gaincom.com.my

SWING GATE CONTROL PANEL (ADJUSTABLE HIGH AMP. CUT-OUT, 1 AND 2-SIDE CONTROL)
Model : AMP-7

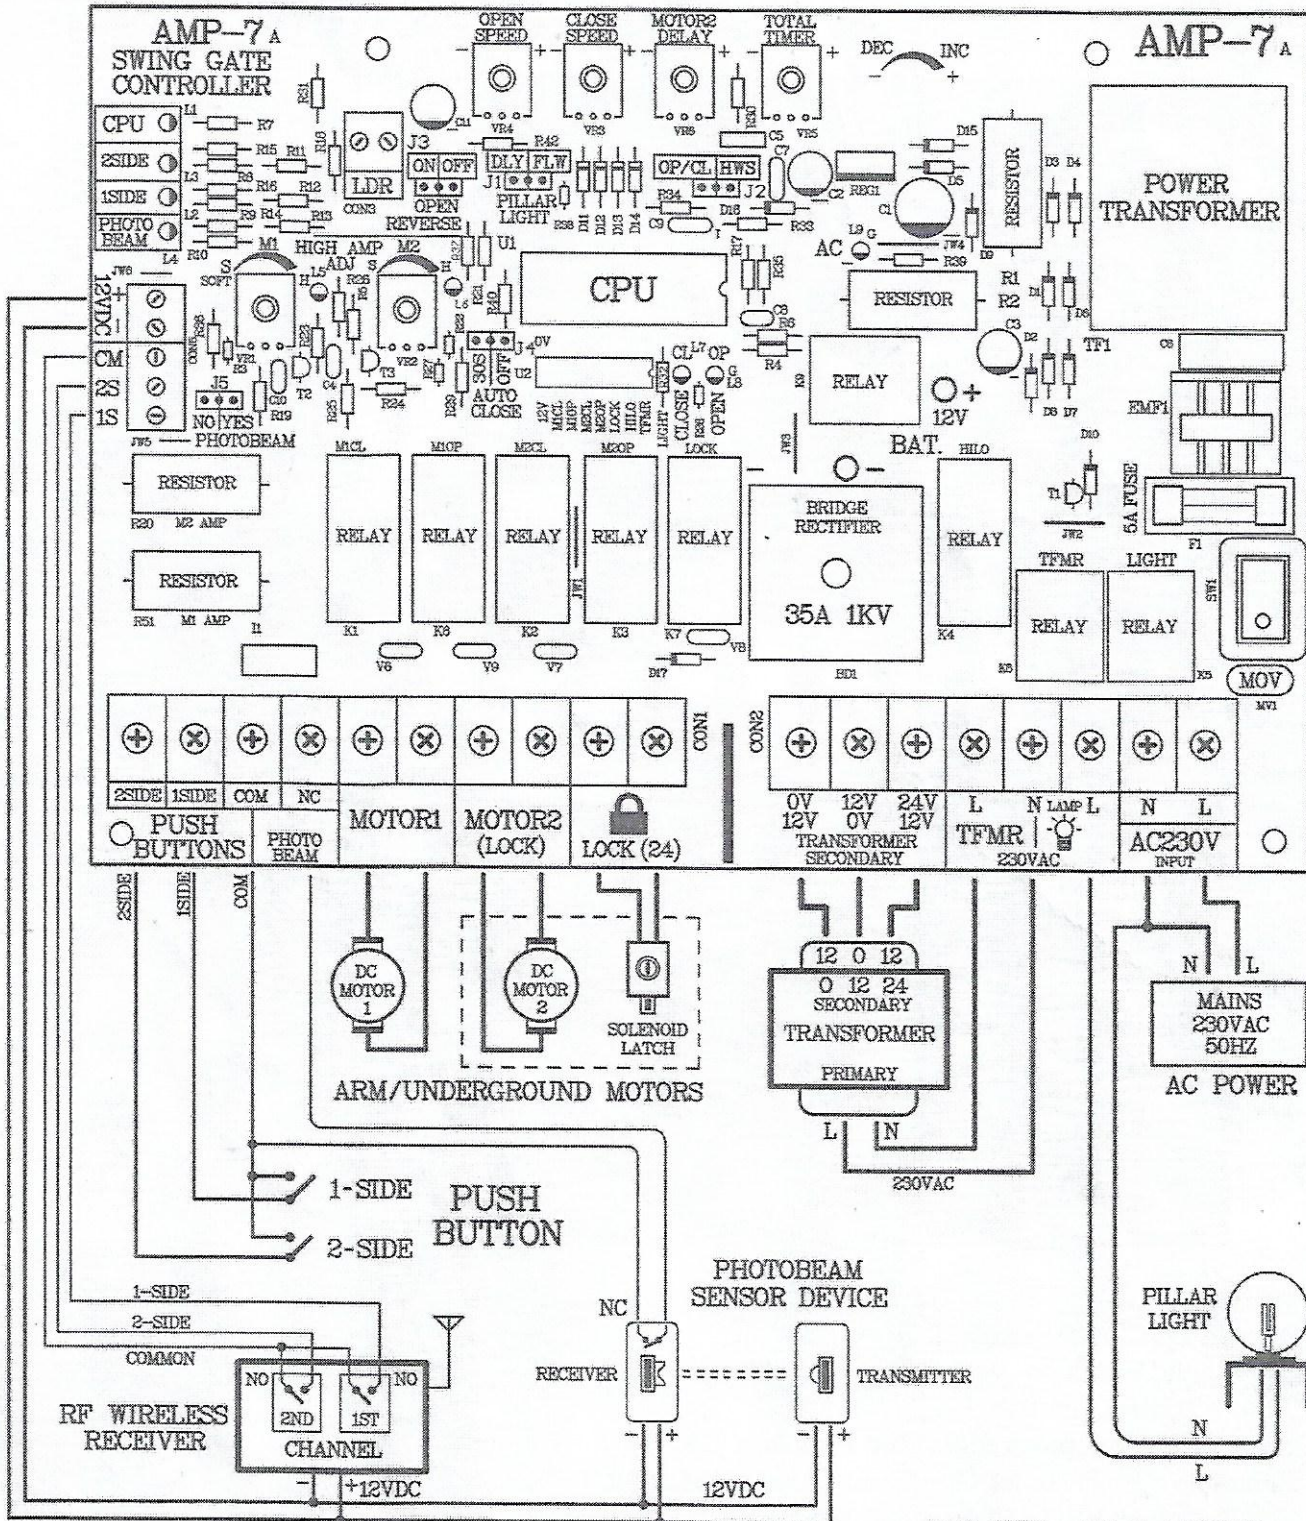

FEATURES :

1. INDIVIDUAL ADJUSTABLE MOTOR HIGH AMP. CUT OFF AT LOW SPEED (MOTOR1 BY VR1 AND MOTOR2 BY VR2).
2. ADJUSTABLE TIMER FOR "OPEN SPEED", "CLOSE SPEED", "MOTOR2 DELAY" AND "TOTAL TIMER".
3. BATTERY CHARGING AND BACKUP BY 12V BATTERY (SEALED LEAD ACID BATTERY OF 12V 7AH IS RECOMMENDED).
4. PUSH BUTTONS FOR 2-GATE-LEAVES (2SIDE) AND 1-GATE-LEAF (1SIDE) OPERATION.
5. OPEN REVERSE CONTROL (SHORT MOMENTARY PULL BACK DURING INITIAL OPENING) CAN BE SELECTED BY JUMPER J3.
6. PILLAR LIGHTING MODE CAN BE FOLLOW MOTION "FLW" OR DELAY OFF "DLY" BY JUMPER J1 (AFTER GATE IS FULLY CLOSED).
7. GATE OPERATION CAN BE HALF-WAY-STOP OR OPEN/CLOSE MODE, SELECTABLE BY JUMPER J2.
8. PHOTOBEAM SAFETY FUNCTION IS IMPLEMENTED USING NC CONTACT MODE, SET JUMPER J5 TO "YES" WHEN IT IS USED.
9. AUTOCLOSE DELAY IS IMPLEMENTED FOR 30 SECONDS AND IS SELECTABLE BY JUMPER J4.